



**SOLVAY**

asking more from chemistry®

KetaSpire® | AvaSpire®

**KetaSpire® PEEK**

**AvaSpire® PAEK**

High-Performance Polyketones

**SPECIALTY  
POLYMERS**

## KetaSpire® PEEK


KetaSpire® PEEK (polyetheretherketone) is one of the industry's most chemically resistant plastics and provides excellent strength and fatigue resistance along with a continuous-use temperature of 240 °C (464 °F). Its unique combination of superlative properties enables it to replace metal in some of the most severe end-use environments. Glass fiber and carbon fiber reinforced grades provide a wide range of performance options.

### Key features

- Exceptional chemical resistance to organics, acids and bases
- Continuous use up to 240°C (464°F)
- Very good wear and abrasion resistance
- Low CLTE and high limiting PV properties
- Best-in class fatigue resistance
- Excellent dimensional stability
- Excellent resistance to hydrolysis in boiling water and superheated steam
- Superior dielectric with low loss at high temperatures and frequencies
- Ease of processing
- High purity

### Ductility and toughness comparison

ASTM test method

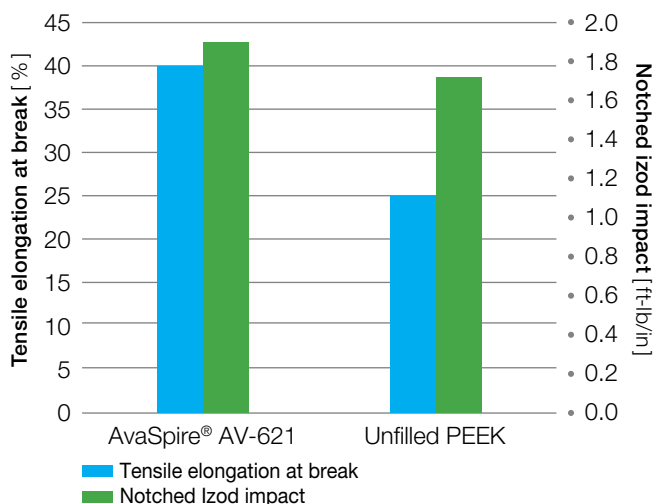

## AvaSpire® PAEK

AvaSpire® resin is a versatile family of polyaryletherketones (PAEK) that are tailored to provide new and unique combinations of performance and value. The AV-600 Series delivers a range of distinctive performance attributes with some grades offering more attractive economics when compared to PEEK. The AV-700 Series offers comparable performance to PEEK at up to 30 % lower cost.

### AV-600 Series

#### Key features


- Higher stiffness than PEEK from 150 °C to 190 °C (302 °F to 374 °F)
- Improved ductility and toughness
- Excellent chemical resistance
- UL 94 V0 rating at 0.8 mm
- Excellent aesthetics and colorability

### AV-700 Series

#### Key features

- Comparable strength and stiffness to PEEK
- Equal or better chemical resistance than PEEK
- Very good friction and wear properties
- Up to 30 % lower cost

### Mechanical performance at high temperature

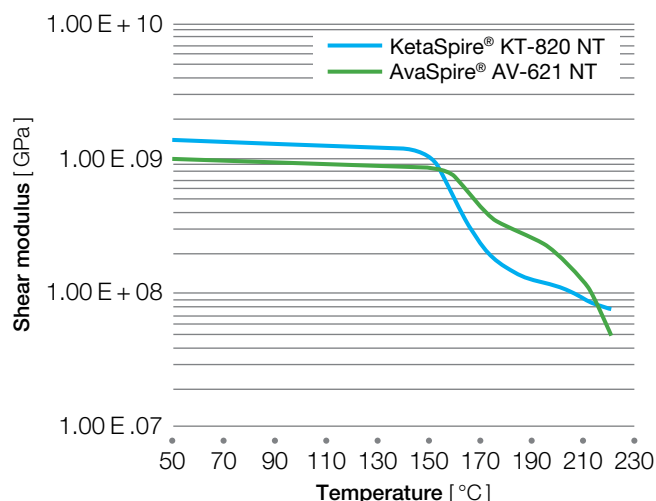

[www.solvay.com](http://www.solvay.com)

[SpecialtyPolymers.EMEA@solvay.com](mailto:SpecialtyPolymers.EMEA@solvay.com) | Europe, Middle East and Africa

[SpecialtyPolymers.Americas@solvay.com](mailto:SpecialtyPolymers.Americas@solvay.com) | Americas

[SpecialtyPolymers.Asia@solvay.com](mailto:SpecialtyPolymers.Asia@solvay.com) | Asia Pacific



**SOLVAY**

asking more from chemistry®

Material Safety Data Sheets (MSDS) are available by emailing us or contacting your sales representative. Always consult the appropriate MSDS before using any of our products. Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right. All trademarks and registered trademarks are property of the companies that comprise Solvay Group or their respective owners.

© 2014 Solvay Specialty Polymers. All rights reserved. D 05/2012 | R 06/2014 | Version 1.4